

GENERAL USE/FALL ZONE & FOOTING RECOMMENDATIONS

SINGLE AXIS SWINGS:

The Use/Fall Zone should extend to the front & rear, a minimum distance of twice the height of the Top Rail above the resilient surfacing material. The Use/Fall Zone to the sides should follow the general recommendation of six feet minimum. This six foot zone may overlap that of an adjacent swing structure.

MUTLI AXIS SWINGS:

The Use/Fall Zone should extend in all directions the length of the swing plus six feet. The six foot minimum fall zone from the supporting structure also applies, and may overlap the six foot zone of an adjacent swing structure.


GENERAL MAINTENANCE INSTRUCTIONS:

Check MONTHLY for loose bolts, damaged or broken parts. Tighten and/or replace immediately. On swings and any equipment that uses S-Hooks and/or Swing Hangers check the bearing surfaces for wear. Replace any parts that show a reduction of 25% from the original size.


SPECIFIC ASSEMBLY INSTRUCTIONS:

STEP #1: Mark & dig footing holes per SKETCH on PAGE #2.

STEP #2: Assemble Swing Frame on ground. Attach Top Rail & Legs to End Fittings.

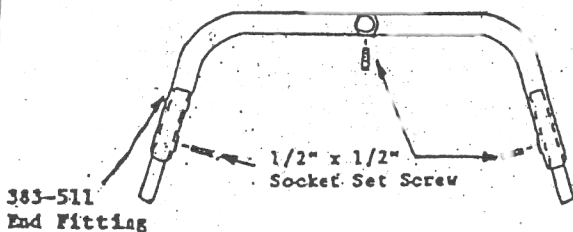

STEP #3: Attach Swivel & Wheelchair Platform to Frame Assy.

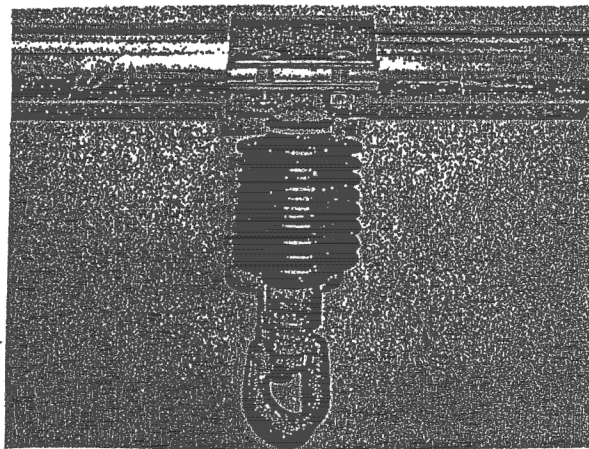

Attach wheelchair platform to swivel with S-hooks. Adjust S-hooks if necessary. Close S-hooks.

STEP #4: Stand Swing upright & brace Legs in footing holes. Prop Wheelchair Platform so that bottom of main Platform is approximately 2" above the intended level of Resilient surfacing.

STEP #5: Plumb & level entire unit. Tighten all nuts & bolts until Lock Washers are flat. Use short length of pipe on end of Socket Key to add leverage when tightening Socket Set Screw. Pour Concrete. Wait 48 hours before removing braces, applying Resilient Surfacing & using equipment.

STEP #6: Attach Warning Label and Manufacturer's Identification Label to a clean surface. The Labels should be attached in a location where they are clearly visible and legible and away from normal hand and foot placement areas. The Labels must be replaced if they become illegible, destroyed or removed.